

# 小蜜蜂 (Wi-Fi版) 数采器

## 快速安装指南

Wi-Fi Plug Pro-13




iOS




Android

### 1. 电气连接

- ① 将数采器的串口与逆变器的串口对齐，插紧。
- ② 用螺丝把数采器固定在逆变器上。
- ③ 确认数采器各指示灯状态正常（步骤2.3连网设置完成后，四灯常亮为正常）。

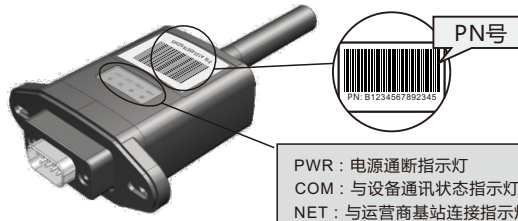

- PWR: 电源通断指示灯
- COM: 与设备通讯状态指示灯
- NET: 与运营商基站连接指示灯
- SRV: 与服务器连接状态指示灯

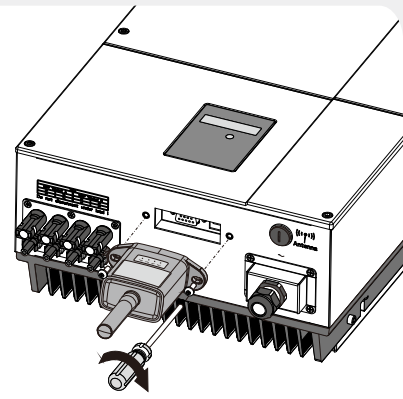

### 2. 无线路由器连接

#### 2.1 APP下载与连接Wi-Fi数采器

- ① 扫描快速安装指南封面上的二维码，下载APP。
- ② 打开手机的无线局域网，找到与数采器PN号相同的Wi-Fi进行连接。（初始密码：12345678）。




#### 2.2 Wi-Fi配置

- ① 手机连接数采器Wi-Fi后，打开APP，点击“Wi-Fi配置”按钮，进入“Wi-Fi配置”页面。
- ② 在“Wi-Fi配置”页面中，点击“连网设置”按钮，进入该界面。



#### 2.3 连网设置

- ① 在“连网设置”页面，填写路由器相关信息，完成连网设置。
- ② 数采器重启后，回到手机无线局域网重新连接步骤2.1所连接的数采器Wi-Fi。

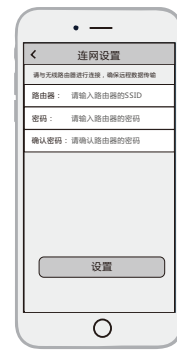

### 3. 注册账号与创建电站


#### 3.1 注册账号

- ① 在APP首页，点击“注册”按钮，按提示填写相关信息，完成注册。



#### 3.2 创建电站



- ① 登录APP，选择“列表”菜单。
- ② 点击右上角的“+”按钮，进入到“创建电站”页面。
- ③ 根据提示输入相关信息，完成电站创建。

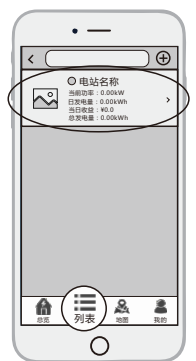

#### 2.3 添加多个数采器设备

注意：一个账号可创建多个电站，一个电站可添加多个数采器，如果您只有一个数采器，则不需此步骤。

- ① 点击已经建好的电站，进入该电站主界面。
- ② 选择“设备”菜单，点击右上角的“+”按钮，进入到“添加数采器”页面。
- ③ 扫描数采器的PN号，添加数采器；如果扫描不成功，可以手动输入。



备注：除护光者APP外，您可以通过微信小程序实现电站的远程监控。



微信扫一扫，使用小程序

- 无需下载 即开即用
- 节省流量 自动更新
- 电站分享 好友互动

# Wi-Fi Plug Pro

## Quick Installation Guideline

Wi-Fi Plug Pro-13





iOS



Android

## 1. Installation


- Align the serial port of the Wi-Fi Plug Pro with the inverter and plug it in tightly.
- Fasten the Wi-Fi Plug Pro to the inverter with the screw.
- Confirm the status of the LED indicator (After step 2.3, when 4 LED indicators keep on, showing the normal working status).

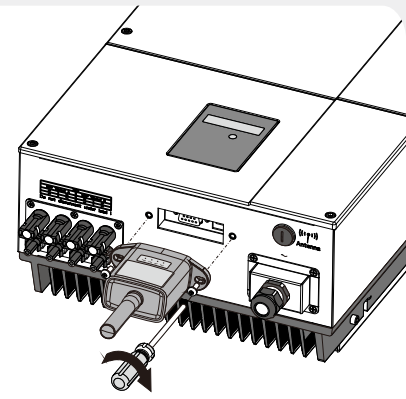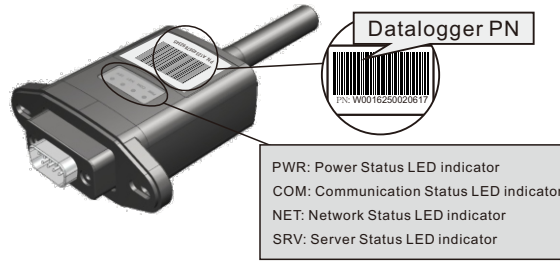

## 2. Wireless Router Connection


### 2.1 Download APP and Wi-Fi connection

- Scan the QR Code from the cover of this guideline and download the APP.
- Select the same number of Wi-Fi Plug Pro PN to connect on your phone WLAN. (Initial Password: 12345678)

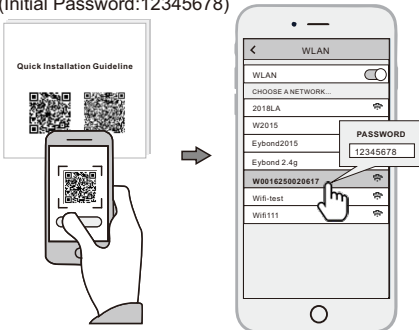


### 2.2 Wi-Fi Config

- Open the APP, Tap the **Wi-Fi Config** button to enter this page.
- Then tap the **Network Setting** button.

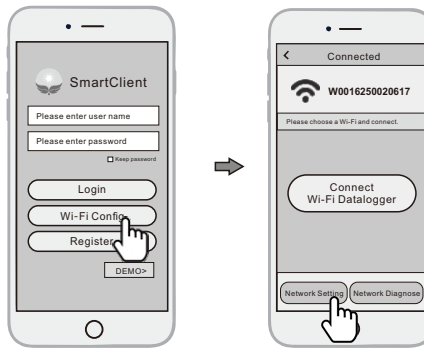

### 2.3 Network Setting


- According to the prompts, type in the information to finish the network setting.
- After the Wi-Fi Plug Pro is restarted, reconnect the Wi-Fi which connected by step 2.1.

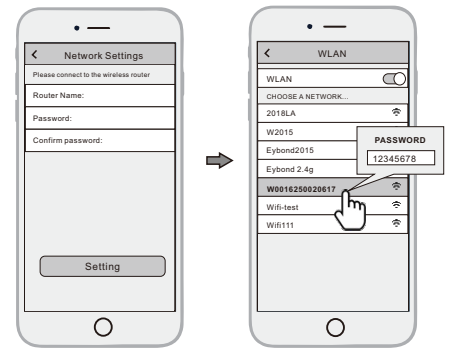

## 3. Create Account And Plant

### 3.1 Create Account

- Open the APP, tap the **Register** button.
- According to the prompt information, complete creating an account.

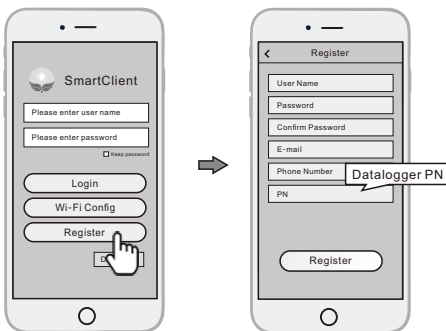

### 3.2 Create Plant


- Login the account and click the **list** button on the bottom of the home page.
- Tap the "+" button on the top-right corner of the list page.
- According to the prompts, type in the information to finish creating plant.



### 3.3 Add Multiple Dataloggers

Note: One account can create multiple plants and one plant can add multiple dataloggers. If you only have one datalogger, you can ignore this step.

- Tap the new plant you just created, and enter its home page.
- Click the **Device** button on the bottom of the home page.
- Tap the "+" button at the top-right corner to add the datalogger.
- Scan the datalogger PN on the Wi-Fi Plug Pro, or input it manually.

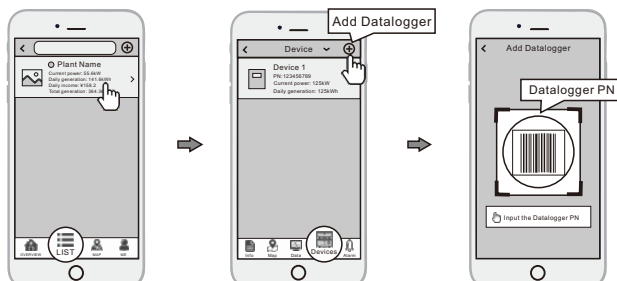

Note: Besides the SmartClient APP, you also can remote monitoring your plants by using WeChat mini program.



Scan the Wechat QR code to use the mini program.